


## ASP SP12 (有支腿，自動平衡)

The ASP-12 equipped with Automatic Leveling System(ALS) can level the machine on the uneven ground of 10degrees on left and right and 4.5 degrees on front and rear.

ASP-12 has large lifting capacity of 350kg, the platform can be extended to 3.3 meters.

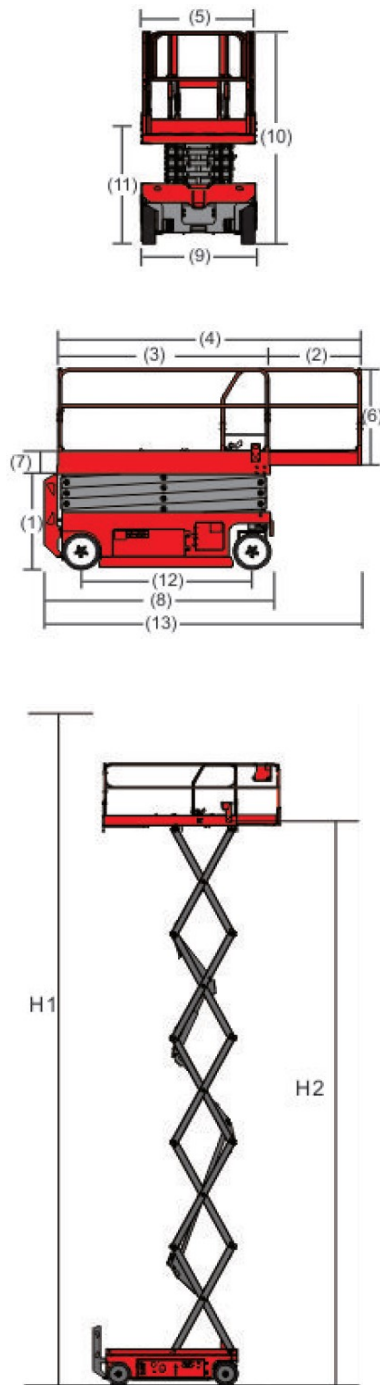

Models	SP12
Working height max (m)	12
Platform height max (m)	10
(2) Outreach (m)	1
Lifting capacity (kg)	350
Lifting capacity (kg) (Extended platform)	120
Weight (kg) ANSI/CSA Standard	2450
CE/AUS Standard	2950
Platform size(3) x (5) x (6) (L x W x H) (m)	2.3 x 1.15 x 1.1
(4) The length of platform extended (m)	3.3
(7) Skirting board height (m)	0.172
Stowed size(8) x (9) (L x W) (m)	2.42 x 1.2
(10) Stowed height (m)	2.38
(13) Length of the machine with platform extended (m)	3.5
(11) Height of the machine with platform folded (m)	1.82
Hydraulic tank capacity (L)	25
Gradeability	25%
(12) Wheelbase (m)	1.85
Ground clearance (m)	0.1
Pothole protection board ground clearance (m) (down)	0.019
Inside rotation radius (m)	0
Outside turning radius (m)	2.3
Load number max	2
Raised time/Lowering time (s)	58/37
Traction speed (km/h)	3.4
Safe Speed (km/h)	0.7
Vertical tilt ANSI CSA	3
Lateral tilt ANSI CSA	2
Power source	4 x 6V: 225Ah
Tire size (mm)	406 x 127 x 318
Drive model	electric drive

連嘗有限公司

Link Attempt Limited

香港新界上水金錢 金坑路9號 DD92 Lot 937

DD92 Lot 937, Kam Tsin, 9 Kam Hang Road, Sheung Shui, N.T., H.K.

Tel: 852 2494 0788

Fax: 852 2426 6509